

SCITUATE CONCRETE PIPE

Reinforced Concrete Pipe Mortar joint


36" Mortar Joint Reinforced

Design Notes:

1. MFG. in accordance with ASTM Spec. C76 & AASHO Spec. M170, Wall B.
2. Cement Type II
3. Concrete Strength Class III & IV 4000 P.S.I. Class V 6000 P.S.I.
4. Circum. Reinforcement:

| | |
|-----------|----------------------------------|
| Class III | 0.17 Sq. in. per. ft. inner cage |
| | 0.13 Sq. in. per. ft. outer cage |
| Class IV | 0.30 Sq. in. per. ft. inner cage |
| | 0.22 Sq. in. per. ft. outer cage |
| Class V | 0.50 Sq. in. per. ft. inner cage |
| | 0.38 Sq. in. per. ft. outer cage |

5. laying length 8'-0"

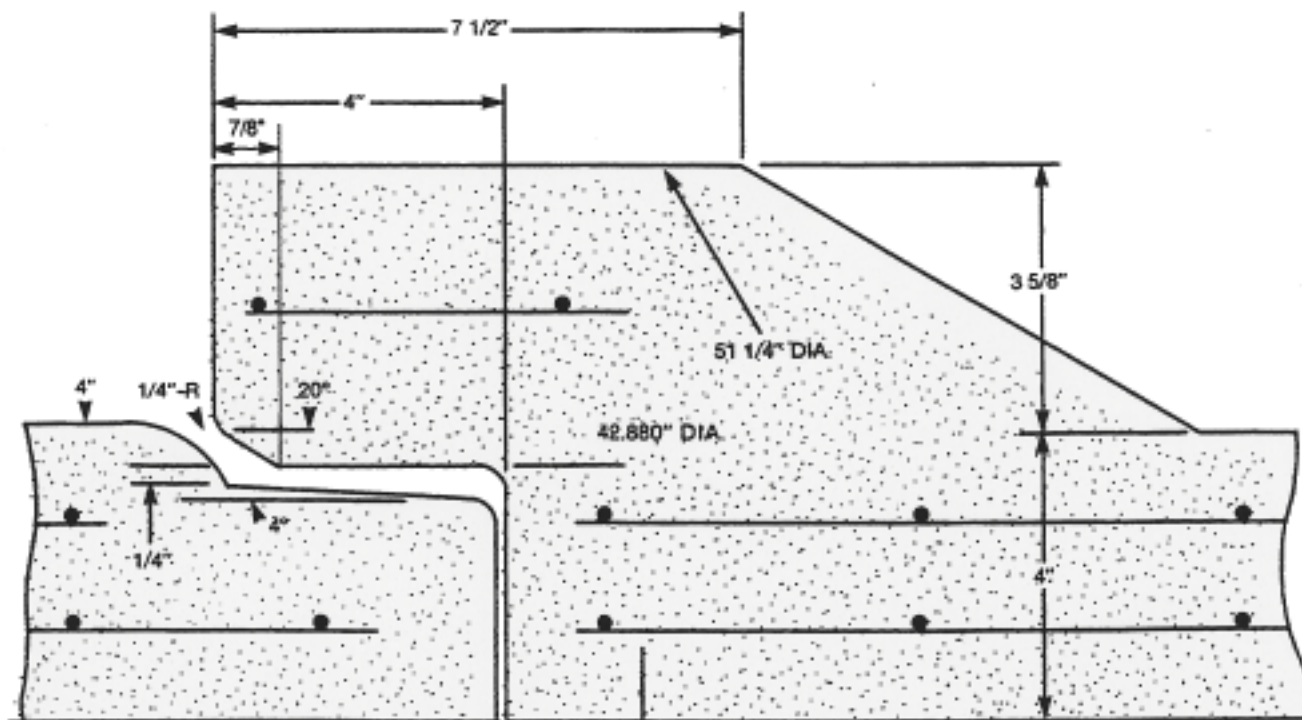

N.T.S.