



21" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:
 CLASS III 0.07 SQ. IN. PER FT.
 CLASS IV 0.20 SQ. IN. PER FT.
 CLASS V 0.24 SQ. IN. PER FT.
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

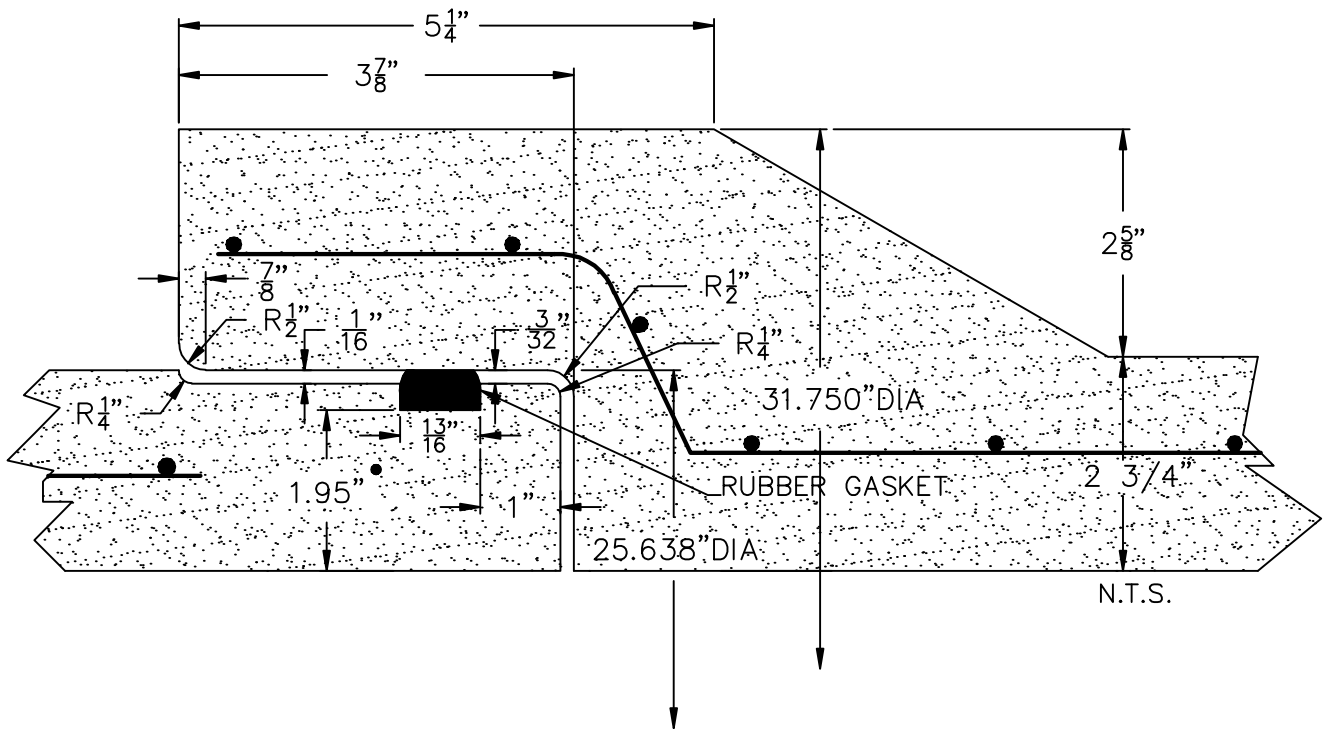

		SCITUATE CONCRETE PRODUCTS P.O. BOX 636 120 CLAY PIT RD MARSHFIELD, MA 02050 PHONE # 1-800-322-4488 FAX # 781-545-6021	
		CONTRACTOR:	JOB NAME:
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT	

