


30" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:
 CLASS III 0.18 SQ. IN. PER FT.
 CLASS IV 0.35 SQ. IN. PER FT.
 CLASS V 0.41 SQ. IN. PER FT. INNER CAGE
 0.24 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

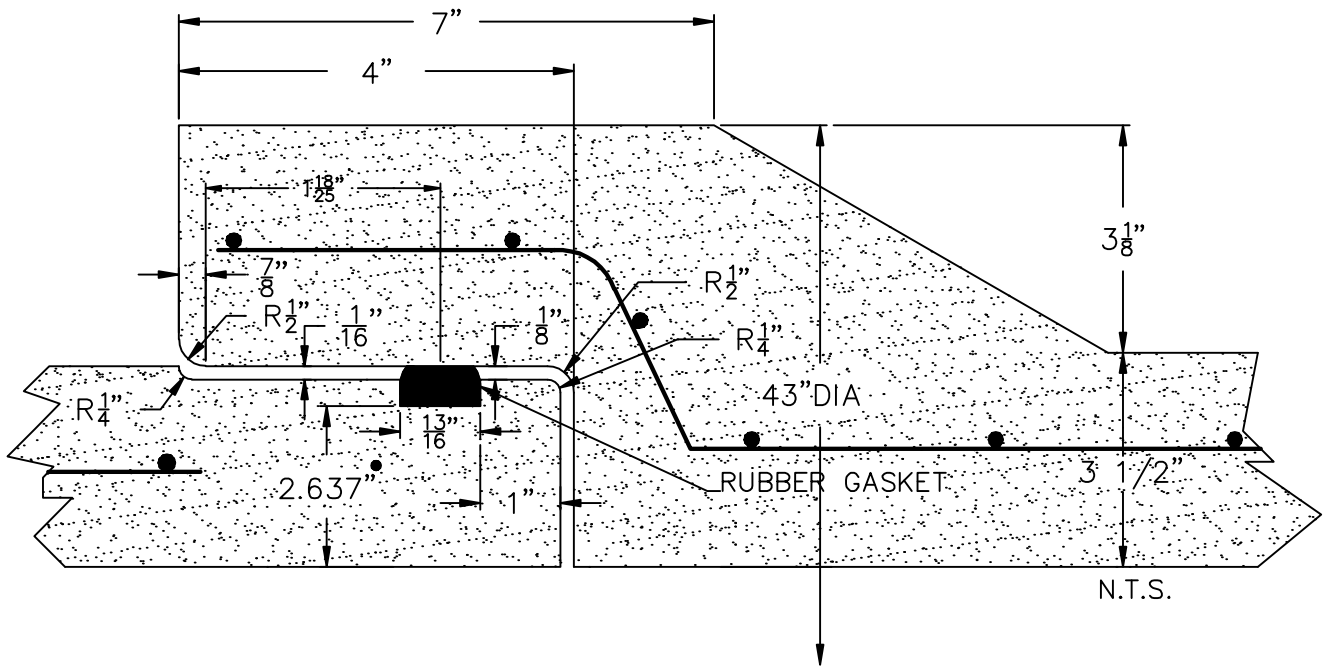


SCITUATE
 CONCRETE PRODUCTS

SCITUATE CONCRETE PRODUCTS
 P.O. BOX 636 120 CLAY PIT RD
 MARSHFIELD, MA 02050
 PHONE # 1-800-322-4488
 FAX # 781-545-6021

| | | | |
|-------------|--------------|------------------------|--|
| CONTRACTOR: | | JOB NAME: | |
| DATE: | APPROVED BY: | DRAWING BY: C.J. SCOTT | |

