



# 42" RCP O-RING JOINT REINFORCED

**DESIGN NOTES:**

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:
  - CLASS III 0.21 SQ. IN. PER FT. INNER CAGE  
0.12 SQ. IN. PER FT. OUTER CAGE
  - CLASS IV 0.35 SQ. IN. PER FT. INNER CAGE  
0.21 SQ. IN. PER FT. OUTER CAGE
  - CLASS V 0.60 SQ. IN. PER FT. INNER CAGE  
0.36 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

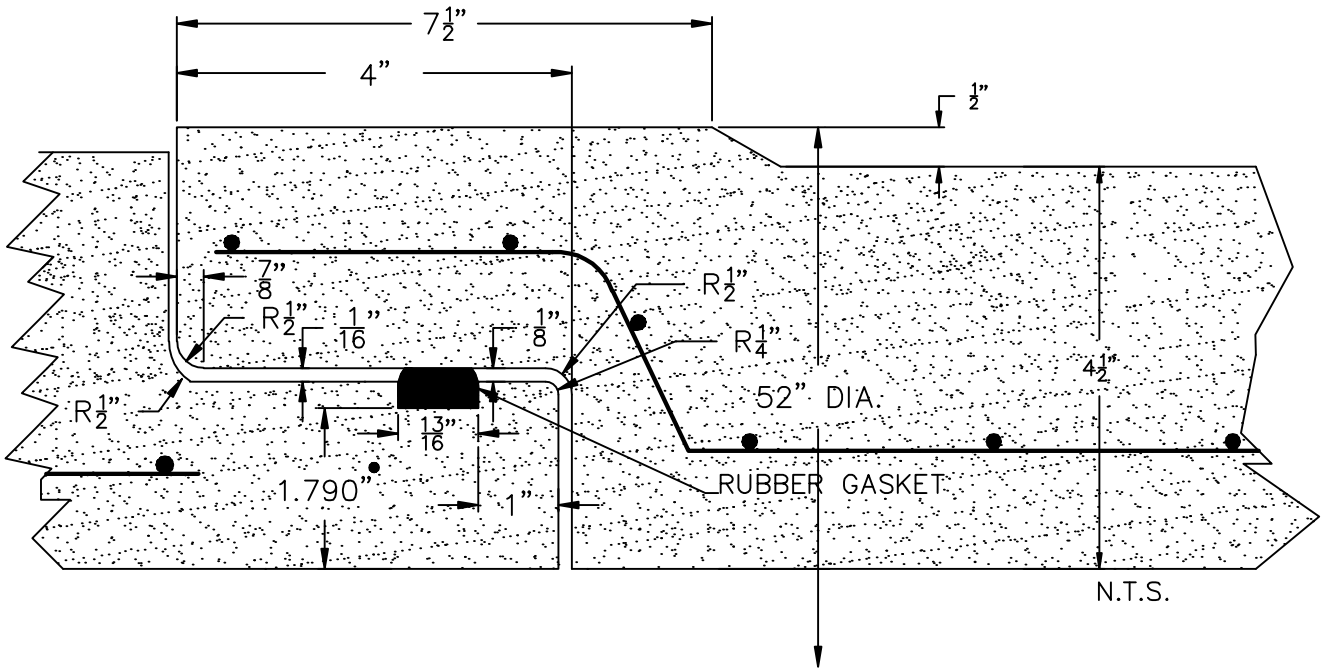

|  |              |  |  |
|--|--------------|--|--|
|  |              | SCITUATE CONCRETE PRODUCTS<br>P.O. BOX 636 120 CLAY PIT RD<br>MARSHFIELD, MA 02050<br>PHONE # 1-800-322-4488<br>FAX # 781-545-6021 |  |
| CONTRACTOR:  |              | JOB NAME:  |  |
| DATE:  | APPROVED BY: | DRAWING BY: C.J. SCOTT   |  |

