



54" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:
 - CLASS III 0.21 SQ. IN. PER FT. INNER CAGE
0.12 SQ. IN. PER FT. OUTER CAGE
 - CLASS IV 0.34 SQ. IN. PER FT. INNER CAGE
0.20 SQ. IN. PER FT. OUTER CAGE
 - CLASS V 0.58 SQ. IN. PER FT. INNER CAGE
0.35 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

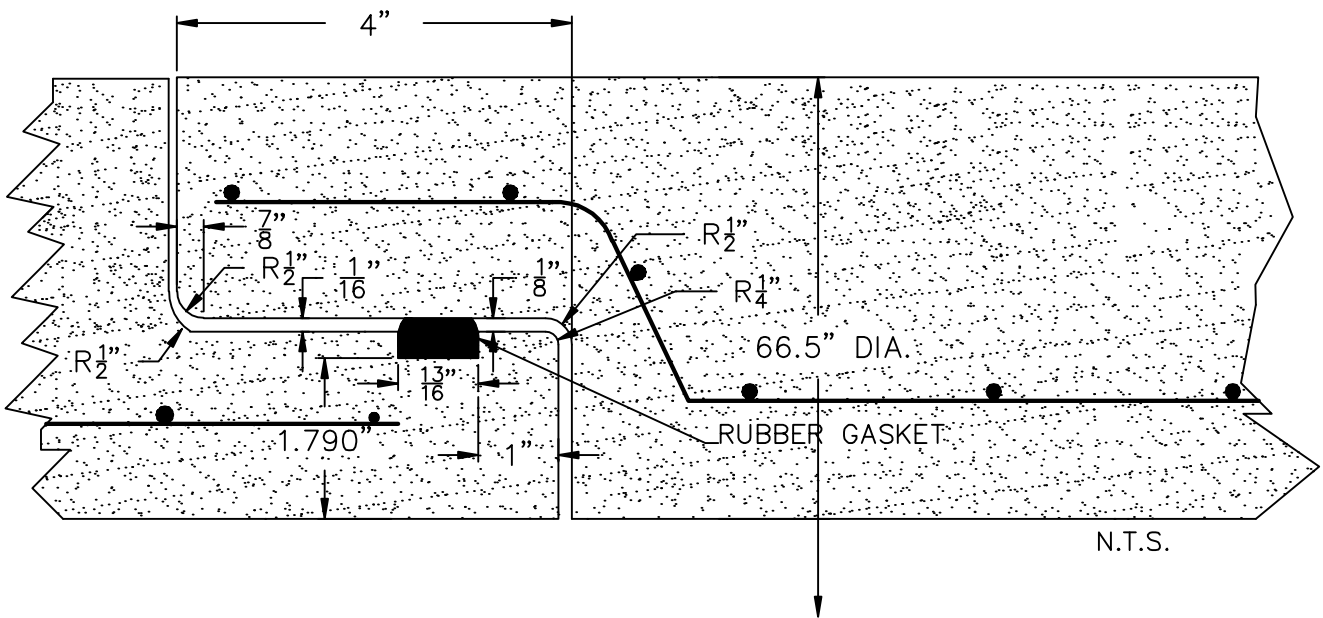

		SCITUATE CONCRETE PRODUCTS P.O. BOX 636 120 CLAY PIT RD MARSHFIELD, MA 02050 PHONE # 1-800-322-4488 FAX # 781-545-6021	
CONTRACTOR:		JOB NAME:	
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT	

